

ROLLPACK

Self-supporting cast iron roller



www.razol.fr

ROLLPACK

Self-supporting cast iron roller


Strong points



- Hydraulic connection : 2 DA output
- Good weight distribution
- Land's shape monitoring
- Transport width 2,45 m
- 3 elements

Standard equipments

- CHASSIS steel beam 100 x 100 x 10 mm
- 2 SIDE ELEMENTS steel beams 100 x 100 x 8 mm (Rollpack 5,25 and 6,25 m)
- 2 SIDE ELEMENTS steel beams 150 x 100 x 8 mm (Rollpack 7,25 and 8,25 m)
- DRAWBAR steel beams 150 x 100 x 8 mm
- HITCH RING fixed Ø51 adjustable 4 positions
- LOAD TRANSFER steel beams 150 x 100 x 8 mm
- 2 WHEELS 260/70 - 15.3 FL+
- HYDRAULIC FOLDING 2DA controlled from the tractor
- BEARING with self-aligning bearings
- LOCKING of side elements in transport mode
- LED LIGHTING as standard



The heavy self-supporting roller ROLLPACK has been designed for tamping, crumbling and soil levelling. It is especially made to improve soil-seed contact after sowing or soil-root after a frost, to avoid evaporation and erosion, to crumble soil after plowing or between two seedbed preparations.

+ HITCH


Fixed ring adjustable 4 positions.
Optional raised ring.

+ CROSSING AXLE

Square of 60 mm.

+ WHEELS 260/70 - 15.3 FL+

Or wheels 300/80 - 15.3 FL+ in option.

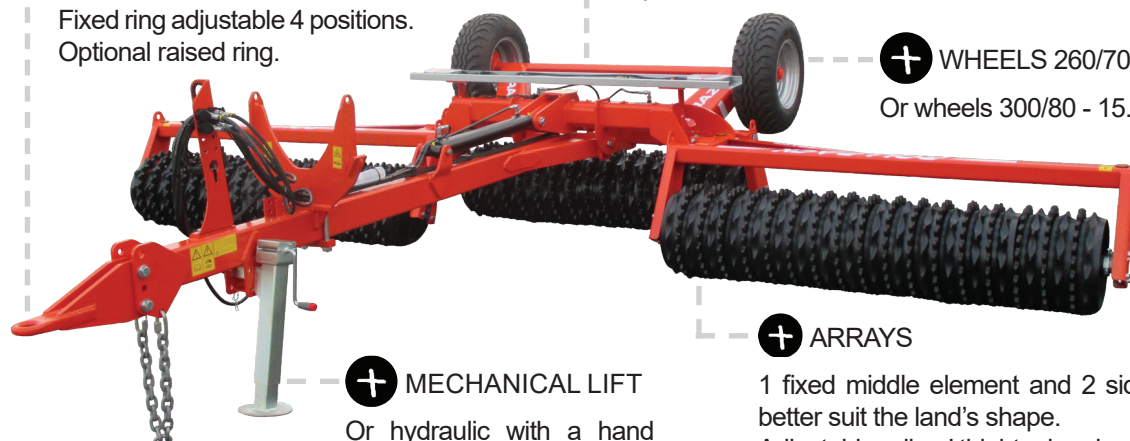

+ ARRAYS

1 fixed middle element and 2 side elements to better suit the land's shape.
Adjustable rollers' tightening rings.

+ MECHANICAL LIFT

Or hydraulic with a hand pump in option.

+ TRANSPORT MODE

Safe. The lifters stay in place in the cradle thanks to an anchor.



ROLLPACK

	Working width	5,25 m	6,25 m	7,25 m	8,25 m
Power		80 to 100 cv	90 to 110 cv	100 to 130 cv	120 to 150 cv


Roller

CAMBRIDGE Ø520 mm	Weight	2 650 kg	3 050 kg	3 500 kg	3 800 kg
CORRUGATED-CAMBRIDGE Ø520 mm	Weight	2 500 kg	2 900 kg	3 300 kg	3 600 kg
CROSSKILL Ø550 mm	Weight	2 650 kg	3 000 kg	3 500 kg	3 800 kg
CORRUGATED Ø500 mm	Weight	2 550 kg	2 850 kg	3 300 kg	3 650 kg

Options and accessories :

- Stone bins
- Hectare counter
- Wheels 300/80 - 15,3 FL+
- Wheels 13.0/55 R 16 - 14 ply
- Raised ring Ø41 (for exportation only)
- Retractable hydraulic lift
- Wheels chocks

ROLLER

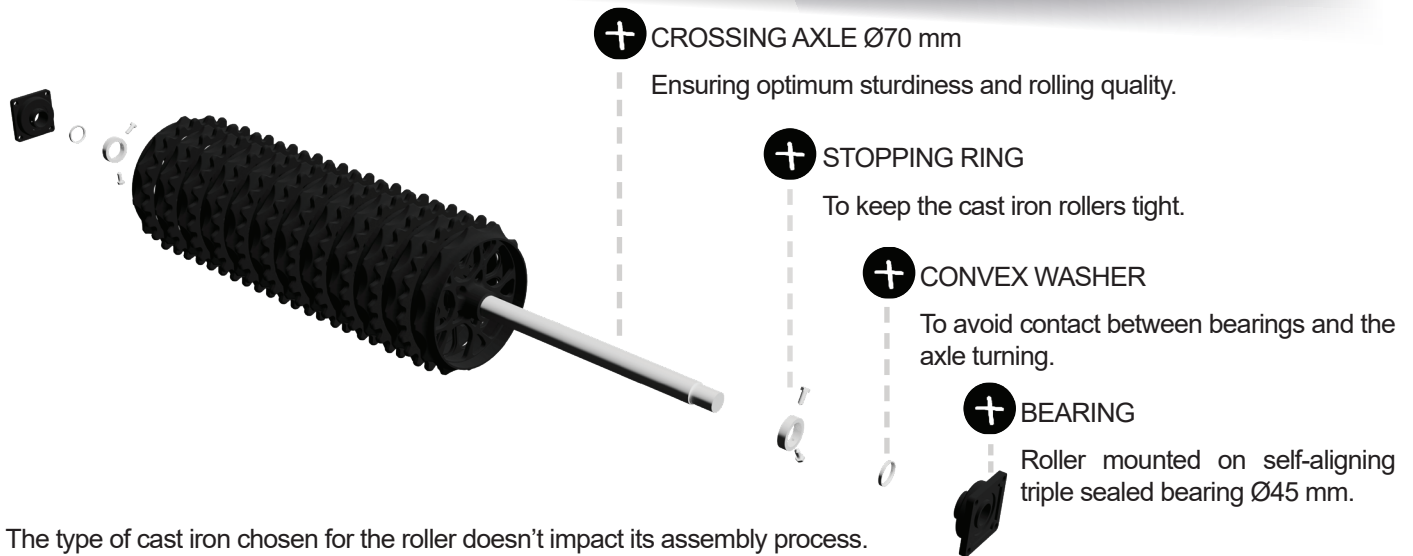

CAST IRON ROLLERS



+ CAMBRIDGE Ø520 mm LIFETIME WARRANTY

Its aggressive shape can make effective soil crumbling during seedbed preparation. With a weight of more than 500 kg per meter, it offers excellent quality tamping.


Suitable for heavy and sticky soils.



+ CORRUGATED-CAMBRIDGE Ø520 mm LIFETIME WARRANTY

The alternation between Cambridge and Corrugated elements makes it highly versatile.

Suitable for work in clay land or spring tamping.

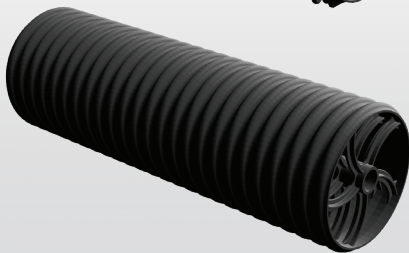

+ CORRUGATED Ø500 mm LIFETIME WARRANTY


This type of wheel can make furrow in the soil, which limits soil slaking.

Suitable for post-sowing tamping and spring rolling.

SPRINGFLEX SYSTEM



The SPRINGFLEX system ensures rolling following the land's shape in all levelling situation while equally dividing the weight between the elements thanks to its connecting springs.

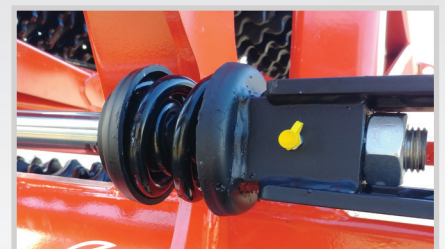



Devices **with INDEPENDENT DISCS**

SKYRON fixed independent disc harrow
SKYRON folding independent disc harrow
SKYRON self-supporting independent disc harrow



Devices **with DISCS X**

ORBYS self-supporting X combining sprayer
ZÉNITH RGH self-supporting X combining sprayer
ZÉNITH RZH self-supporting X combining sprayer
ZÉNITH RJH self-supporting X combining sprayer
PHÉNIX TGX self-supporting X sprayer
PHÉNIX TBX self-supporting X sprayer



Devices **with DISCS V**

CWH - CWHR super heavy self-supporting V Cover Crop
SYNCHRONIC CIN self-supporting V Cover Crop
CLH - CVH heavy self-supporting V Cover Crop
CIH - CJH self-supporting V Cover Crop



Devices **with SUPPORTED DISCS**

VITICROP mounted X sprayer
VINIDISC mounted disc harrow
TXL mounted X sprayer
TRW heavy-duty mounted reversible sprayer
CCW - CCU mounted reversible sprayer



Devices **for ROLLING**

ROLLPACK self-supporting cast iron roller
TORO - RVH self-supporting cast iron roller
RVH EVO self-supporting steel smooth roller



Devices **with TINES**

KILIS - KILIS R combined cultivator with flexible tines
TÉOS - TÉOS R stubble cultivator with curved tines 3 rows



Devices **for LOOSENING**

ARASOL AVLE supported subsoiler
ARASOL AVS - AVR supported subsoiler
ARAPLOW ACV supported decompactor
ARAPLOW ACM - ACMH supported decompactor
ARAMULCH ADM - ADMH supported decompactor
DVV supported subsoiler for vineyard and orchards



Devices **for SPRING**

BLI - BMI - BSI folding and fixed mounted cultivator