

# RVH EVO

Self-supporting steel smooth roller



[www.razol.fr](http://www.razol.fr)



# RVH EVO

Self-supporting steel smooth roller

## Strong points

The RVH EVO is suited for small and large farm.

With sturdy design, it effectively rolls on any kind of soil.

Especially made for post-sowing, it makes soil keep fresh and it optimizes the seedling emergence. It can also be used to roll on meadows.

Its pendular elements give optimum efficiency regardless of the soil.

3 elements (1 center + 2 pendular)

Transport width 2,45 m

Hydraulic connection 2 DA outputs

Fillable

### + WHEELS

260/70-15,3 as standard.

The wheels can be switched to 300/80-15,3 or 400/60-15,3 for better confort for trips between plots and on the road.

### + SAFETY

Homologated tool without braking for 40 km/h with standard LED signalling.

### + ARRAYS

1 fixed center element and 2 side pendular elements for better adaptation to the land outline.

### + HITCH

Fixed ring as standard.

Optional rotating ring and lifting arm category 3N to suit all types of tractors and use.

### + CHASSIS

Steel beam 200 x 100 x 10 mm and 180 x 100 x 8 mm for great sturdiness in difficult conditions. Reinforced chassis for RVH EVO 8.

### + MECHANICAL LICK

As standard.

Hydraulic in option.

### + TRANSPORT


The transport width is less than 2,50 m on the road to ease all trips.

The lifting is done by a single DA cylinder.

The folding is done by 2 DA cylinders to easily switch to transport mode on sloping and rugged land.

### + CRADLE

The pendular elements are stored on specially made cradle for transport safety.

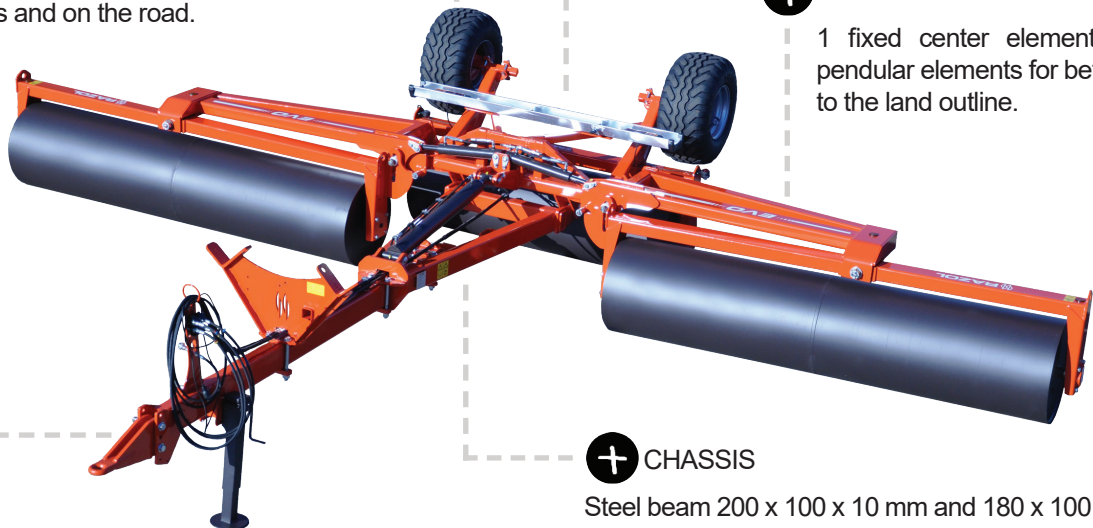

# ROLLER

The rollers weight is adjustable. It can be filled with water or oil until a maximum of half the roller is reached, adding weight up to:

- 1 100 kg for RVH EVO 6
- 1 400 kg for RVH EVO 8



BEARING

Roller mounted on self-aligning triple sealed bearings Ø60 mm.



SMOOTH ROLLER Ø700 mm


This rolling element with high diameter and high thickness (12 mm) is perfect for specialized or fragile crops and stony areas.



CROSSING AXE Ø70 mm

Guarantees optimum sturdiness and rolling quality.

## CHARACTERISTICS

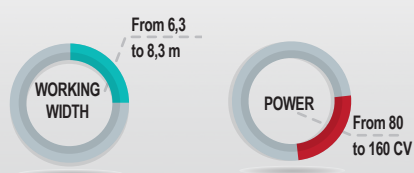

RVH EVO		
Working width	6,30 m	8,30 m
Transport width	2,45 m	2,45 m
Number of elements	3	3
Weight	2 995 kg	3 940 kg

*Options available:*

- Stone bins
- Hectare counter



### Devices **with INDEPENDENT DISCS**

SKYRON fixed independent disc harrow  
SKYRON folding independent disc harrow  
SKYRON self-supporting independent disc harrow



### Devices **with DISCS X**

ORBYS self-supporting X combining sprayer  
ZÉNITH RGH self-supporting X combining sprayer  
ZÉNITH RZH self-supporting X combining sprayer  
ZÉNITH RJH self-supporting X combining sprayer  
PHÉNIX TGX self-supporting X sprayer  
PHÉNIX TBX self-supporting X sprayer



### Devices **with DISCS V**

CWH - CWHR super heavy self-supporting V Cover Crop  
SYNCHRONIC CIN self-supporting V Cover Crop  
CLH - CVH heavy self-supporting V Cover Crop  
CIH - CJH self-supporting V Cover Crop



### Devices **with SUPPORTED DISCS**

VITICROP mounted X sprayer  
VINIDISC mounted disc harrow  
TXL mounted X sprayer  
TRW heavy-duty mounted reversible sprayer  
CCW - CCU mounted reversible sprayer



### Devices **for ROLLING**

ROLLPACK self-supporting cast iron roller  
TORO - RVH self-supporting cast iron roller  
RVH EVO self-supporting steel smooth roller



### Devices **with TINES**

KILIS - KILIS R combined cultivator with flexible tines  
TÉOS - TÉOS R stubble cultivator with curved tines 3 rows



### Devices **for LOOSENING**

ARASOL AVLE supported subsoiler  
ARASOL AVS - AVR supported subsoiler  
ARAPLOW ACV supported decompactor  
ARAPLOW ACM - ACMH supported decompactor  
ARAMULCH ADM - ADMH supported decompactor  
DVV supported subsoiler for vineyard and orchards



### Devices **for SPRING**

BLI - BMI - BSI folding and fixed mounted cultivator