


# TXL

Mounted X sprayer



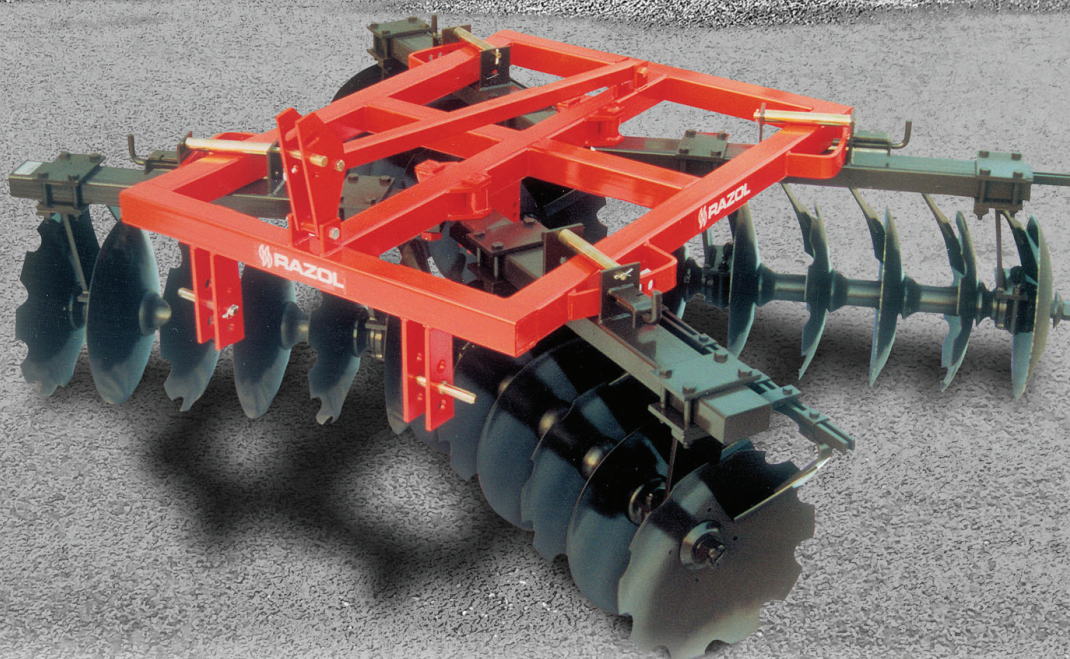

# TXL

Mounted X sprayer

Strong points

The mounted tandem sprayer TXL has been specially designed for ploughing at spring, clods removing and stubble cultivation.

Adapted for light forest work, it perfectly suits poplar groves maintenance.

Robust and compact

Standard signalling

Discs angle manual adjustment

Versatile

## + CHASSIS

Steel beam 100 x 100 x 6 mm.

## + HITCH

Mounted 3 points with clevises category n°2 and 3N to suit all types of tractors. 3° point height adjustable.

## + ANGLE ADJUSTMENT

Manual with sprindles to adjust the tool according to the user's needs.

## + ARRAYS


Steel beam 140 x 80 x 6 mm.

## + SHAFT

Manganese-silica steel of 40 mm, bearings with double rows of tapered rollers, lubrication every 100 hours.

## + MIDDLE TINE

Height adjustable.



TXL 200 mm/610-5 mm				28 discs	32 discs
Working width				2,95 m	3,35 m
Power				80 to 110 cv	90 to 120 cv
Number of bearings				8	8
Weight				1 225 kg	1 345 kg

TXL 230 mm/610-5 mm	16 discs	20 discs	24 discs		28 discs
Working width	1,95 m	2,40 m	2,80 m		3,20 m
Power	60 to 80 cv	70 to 90 cv	80 to 110 cv		90 to 120 cv
Number of bearings	8	8	8		8
Weight	1 060 kg	1 180 kg	1 300 kg		1 420 kg

## ROLLER ROL 9

● CHASSIS steel beam 100 x 100 x 8 mm		● 2 ELEMENT with tamping adjustment by slots				
ROL 9 FLAT IRONS	Working width	2,30 m	2,90 m	3,20 m	3,45 m	3,70 m
Ø400 mm, 8 flats	Weight	285 kg	310 kg	340 kg	355 kg	400 kg

## Options available:

- Discs thickness 6 mm
- Square bearing 40 mm protection shell
- Square bearing 40 mm reinforced protection shell
- Middle disc with screw adjustment instead of the tine
- Automatic hitch n°2
- Ploughing discs Ø450 mm

# DISC, TINE AND BEARING



**Disc Ø610**


- Mounted of square shaft 40 mm
- Thickness available: 5 or 6 mm



**Square bearing of 40 mm**

- Cast iron lids and bearing housings
- Steel sheath
- Tapered roller bearings

**Middle tine  
50 x 18 mm**



**Triangle share  
200 mm**




**Standard protection**



**Reinforced protection**

# ROLLER ROL 9

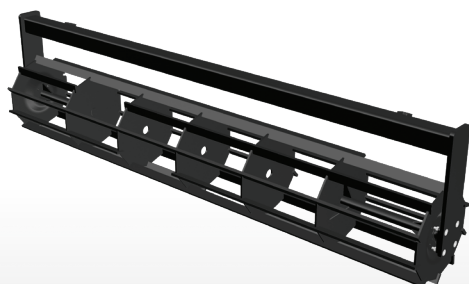

## + FLAT IRONS

Ø400 mm, 9 flats  
Flanged ball bearing Ø30 mm

- Dry and hilly land
- Silt and sand
- Aggressive flat irons
- Weight: 80 kg/m

# ACCESSORIES



## + PLOUGHING DISC Ø450

To avoid any trace of the last disc after the roller passage and to get most perfect surface.

## + MIDDLE DISC INSTEAD OF THE TINE

To work on the middle part and without blocking when encountering plants.



### Devices **with INDEPENDENT DISCS**

SKYRON fixed independent disc harrow  
SKYRON folding independent disc harrow  
SKYRON self-supporting independent disc harrow



### Devices **with DISCS X**

ORBYS self-supporting X combining sprayer  
ZÉNITH RGH self-supporting X combining sprayer  
ZÉNITH RZH self-supporting X combining sprayer  
ZÉNITH RJH self-supporting X combining sprayer  
PHÉNIXTGX self-supporting X sprayer  
PHÉNIXTBX self-supporting X sprayer



### Devices **with DISCS V**

CWH - CWHR super heavy self-supporting V Cover Crop  
SYNCHRONIC CIN self-supporting V Cover Crop  
CLH - CVH heavy self-supporting V Cover Crop  
CIH - CJH self-supporting V Cover Crop



### Devices **with SUPPORTED DISCS**

VITICROP mounted X sprayer  
VINIDISC mounted disc harrow  
TXL mounted X sprayer  
TRW heavy-duty mounted reversible sprayer  
CCW - CCU mounted reversible sprayer



### Devices **for ROLLING**

ROLLPACK self-supporting cast iron roller  
TORO - RVH self-supporting cast iron roller  
RVH EVO self-supporting steel smooth roller



### Devices **with TINES**

KILIS - KILIS R combined cultivator with flexible tines  
TÉOS - TÉOS R stubble cultivator with curved tines 3 rows



### Devices **for LOOSENING**

ARASOL AVLE supported subsoiler  
ARASOL AVS - AVR supported subsoiler  
ARAPLOW ACV supported decompactor  
ARAPLOW ACM - ACMH supported decompactor  
ARAMULCH ADM - ADMH supported decompactor  
DVV supported subsoiler for vineyard and orchards



### Devices **for SPRING**

BLI - BMI - BSI folding and fixed mounted cultivator